

Numerical investigations of the compressible Navier-Stokes system

Bilal Al-Taki^{*1}, Kevin Atsou^{†2}, Jean-Jérôme Casanova^{‡3}, Thierry Goudon^{§2},
Frédéric Lagoutière^{¶4}, Pauline Lafitte^{||5}, and Sebastian Minjeaud^{**2}

¹B.I.C.M.R, Peking University, Beijing, China

²Université Côte d'Azur, Inria, CNRS, LJAD

³Ceremade, Université Paris Dauphine, PSL, CNRS

⁴Institut Camille Jordan, Université Claude Bernard, Lyon

⁵CentraleSupélec, Labo. MICS

April 7, 2020

1 Introduction

We are interested in the simulation of the following Compressible Navier-Stokes system

$$\begin{aligned}\partial_t \rho + \partial_x(\rho u) &= 0, \\ \partial_t(\rho u) + \partial_x(\rho u^2) + \partial_x p - \partial_x(\mu \partial_x u) &= 0.\end{aligned}\tag{1}$$

In (1), the unknowns $(t, x) \mapsto \rho(t, x)$ and $(t, x) \mapsto u(t, x)$ stand respectively for the density and the velocity of a fluid. The quantity $\mu > 0$ is the viscosity of the fluid. We restrict to the isentropic case, where the pressure is a mere function of the density, namely we set $p(\rho) = a\rho^\gamma$, with $a > 0$ and $\gamma > 1$. Here we assume that the fluid is not subjected to external forces.

This contribution is particularly motivated by the pioneering work of D. Hoff [15]. Beyond the existence of weak solutions, [15] establishes several facts about *discontinuous solutions*

*bilal.al-taki@inria.fr

†kevin.atsou@inria.fr

‡casanova@ceremade.dauphine.fr

§thierry.goudon@inria.fr

¶lagoutiere@math.univ-lyon1.fr

||pauline.lafitte@centralesupelec.fr

**Sebastian.minjeaud@univ-cotedazur.fr

of (1), which, at first glance, are quite surprising. Indeed, possible discontinuities of the initial velocity are instantaneously smoothed out: u becomes continuous, while the density ρ can present discontinuities, which are simply advected by the velocity field u , see [17, 26]. The velocity gradient has possible discontinuities, but cancellation occurs so that the mixed quantity $\mu\partial_x u - p$ is continuous. Moreover, the jump discontinuities of (1) tend to 0 exponentially fast as $t \rightarrow \infty$: the smaller the viscosity, the faster the decay. This form is not consistent with the discontinuous solutions of the Euler equations (obtained by replacing μ by 0 in (1)). Shock solutions for the Euler system can be obtained in the vanishing viscosity regime, but discontinuities of (1) do not produce discontinuities for the inviscid system; instead the latter emerge in regular regions for the solutions of (1), see [11, 16]. For further results and references about the existence theory for the compressible Navier-Stokes system, we refer the reader to [6, 19] and the reference books [7, 22]. It is also worth mentioning the recent breakthrough [4] which deals with more intricate pressure laws and introduce new compactness arguments, and [5, 25, 27] for results on the case of density-dependent viscosities.

In terms of numerical methods, the basic idea consists in using an established method for the Euler equation, coupled to a suitable discretization of the diffusion term. In order to avoid non affordable time steps, it is quite natural to make the latter implicit. We will compare such schemes to approaches based on staggered discretizations, where the discrete densities and velocities are stored on dual locations; such methods, strongly motivated by the simulation of low-Mach flows, are discussed for instance in [8, 10, 13, 14, 20] and in [1, 2, 3, 12, 24], with different viewpoints on the construction of the numerical fluxes. We will also perform simulations based on Lagrangian schemes, which are able to follow more accurately the discontinuities. Nevertheless, the convergence analysis of schemes for the compressible Navier-Stokes system is not that developed: we refer the reader to [9, 18] for recent results in this direction; however, these papers investigate fully implicit schemes which could be very difficult to effectively implement (with the additional difficulties of using a Newton algorithm, which itself should be shown to converge in this context).

The paper is organized as follows. In Section 2, we present the numerical schemes that we shall use for the simulation of (1). In Section 3, we discuss a Lax-Wendroff-like statement, which provides a rigorous basis to the most naive numerical strategy. Section 4 is devoted to the discussion of the numerical results.

2 Numerical methods

2.1 A splitting scheme for compressible Navier-Stokes equations

In this section, we propose a very simple scheme that consists in using a classical hyperbolic type scheme for the Euler system and adding, in a splitting procedure, the effect of the viscosity. To approximate the solution of the Euler system, we use the finite volume framework. The computational domain is the slab $(0, 1)$, endowed with periodic boundary conditions for the sake of simplicity. It is discretized into I cells with equal length $C_i = (x_{i-1/2}, x_{i+1/2})$, and

x_i being the center of the cell. This amounts to define, for $I \in \mathbb{N}^*$, $\Delta x = 1/I$, $x_{i+1/2} = i\Delta x$, $x_i = (i + 1/2)\Delta x$ for $i = 0, \dots, I$. Note that we thus have $x_{I+1/2} = 1$, and we define also $x_{1/2} = 0$. For the time discretization, we discuss the schemes with the generic notation $\Delta t > 0$, but it has to be kept in mind that actually Δt will have to satisfy a local in time Courant-Friedrichs-Lewy type constraint. Therefore, in fact Δt may depend on the time step (and the local discrete time should be appropriately denoted $t^n = \sum_{k=1}^n \Delta t^k$ instead of $n\Delta t$). We denote by $X_i^n = (\rho_i^n, q_i^n)$ the approximate solution at time t_n on the cell C_i , where $q_i^n = \rho_i^n u_i^n$ is the discrete momentum: X_i^n is intended to be an approximation of $\frac{1}{\Delta x} \int_{C_i} X(t^n, x) dx$. The unknowns are updated as follows

$$X_i^{n+1} = X_i^n - \frac{\Delta t}{\Delta x} (\mathcal{F}_{i+1/2}^n - \mathcal{F}_{i-1/2}^n). \quad (2)$$

Here and below, we consider only first-order three points schemes where the flux $\mathcal{F}_{i+1/2}^n$ at the interface $x_{i+1/2}$ is defined as a function of the unknowns in the neighboring cells:

$$\mathcal{F}_{i+1/2}^n = \mathcal{F}(X_i^n, X_{i+1}^n).$$

There are many relevant choices for the numerical fluxes. Here, we shall use the Rusanov flux, given by

$$\mathcal{F}(X_i^n, X_{i+1}^n) = \frac{F(X_i^n) + F(X_{i+1}^n)}{2} - \max_{k \in \{1,2\}} (\lambda_k(X_i^n), \lambda_k(X_{i+1}^n)) \frac{X_{i+1}^n - X_i^n}{2}.$$

where

$$F(\rho, q) = \begin{pmatrix} [F(\rho, q)]_1 \\ [F(\rho, q)]_2 \end{pmatrix} = \begin{pmatrix} q \\ q^2/\rho + p(\rho) \end{pmatrix}$$

and

$$\lambda_1(X) = u - \sqrt{p'(\rho)} \quad \lambda_2(X) = u + \sqrt{p'(\rho)}$$

are the eigenvalues of the Jacobian $\nabla_{\rho, q} F(\rho, q)$. We refer the reader for instance to the textbook [21] for further details about this classical scheme for conservation laws. What is crucial is the following consistency property

$$\mathcal{F} \text{ is continuous and satisfies } \mathcal{F}(X, X) = F(X). \quad (3)$$

In the convergence analysis made below, the details of the numerical fluxes are not important, except property (3). The ‘‘splitting’’ scheme for (1) reads

$$\frac{\rho_i^{n+1} - \rho_i^n}{\Delta t} + \frac{1}{\Delta x} \left[[\mathcal{F}_{i+1/2}^n]_1 - [\mathcal{F}_{i-1/2}^n]_1 \right] = 0, \quad n \in \mathbb{N}, i = 1, \dots, I, \quad (4)$$

$$\frac{\rho_i^{n+1} u_i^{n+1} - \rho_i^n u_i^n}{\Delta t} + \frac{1}{\Delta x} \left[[\mathcal{F}_{i+1/2}^n]_2 - [\mathcal{F}_{i-1/2}^n]_2 \right] - \frac{1}{\Delta x} (\mathcal{D}_{i+1/2}^{n+1} - \mathcal{D}_{i-1/2}^{n+1}) = f_i^{n+1}, \quad n \in \mathbb{N}, i = 1, \dots, I, \quad (5)$$

where we have incorporated the diffusion flux at $x_{i+1/2}$, here defined by:

$$\mathcal{D}_{i+1/2}^{n+1} = \mu \frac{u_{i+1}^{n+1} - u_i^{n+1}}{\Delta x}, \quad n \in \mathbb{N}, i = 1, \dots, I-1. \quad (6)$$

Periodic boundary conditions are taken into account by setting

$$\mathcal{D}_{1/2}^{n+1} = \mu \frac{u_1^{n+1} - u_I^{n+1}}{\Delta x} = \mathcal{D}_{I+1/2}^{n+1}, \quad n \in \mathbb{N}, \quad (7)$$

with

$$\rho_{1/2}^{n+1} = \frac{\rho_1^{n+1} + \rho_I^{n+1}}{2} = \rho_{I+1/2}^{n+1}, \quad n \in \mathbb{N}. \quad (8)$$

Note that in the case where the viscosity depends on the density, (5)-(6) involves the density at time t^{n+1} : since it has been already updated by (4) it can be used without any extra cost to update the velocity.

2.2 An explicit scheme on staggered grids

We describe now a scheme on staggered grids: the velocity variables are stored on the cells $C_{i+1/2} = [x_i, x_{i+1}]$, while discrete densities and pressures are stored on $C_i = [x_{i-1/2}, x_{i+1/2}]$. The discrete mass conservation equation reads

$$\frac{\rho_i^{n+1} - \rho_i^n}{\Delta t} + \frac{\mathcal{F}_{i+1/2}^n - \mathcal{F}_{i-1/2}^n}{\Delta x} = 0 \quad (9)$$

where the mass flux $\mathcal{F}_{i+1/2}^n$ is defined from the velocity $u_{i+1/2}^n$ known at the interface $x_{i+1/2}$. Several definitions of the mass fluxes have been introduced, for instance by using the UpWind flux based on the material velocity [14], an idea reminiscent of the AUSM scheme [23]. Here we use instead the mass fluxes proposed in [2] which are constructed by using the characteristic speeds of the hyperbolic system. Denoting $c = \sqrt{p'(\rho)}$ the sound speed, we set

$$\mathcal{F}_{i+1/2}^n = \mathcal{F}^+(\rho_i^n, c_{i+1/2}^n, u_{i+1/2}^n) + \mathcal{F}^-(\rho_{i+1}^n, c_{i+1/2}^n, u_{i+1/2}^n),$$

with

$$\mathcal{F}^+(\rho, c, u) = \begin{cases} 0 & \text{if } u \leq -c, \\ \frac{\rho}{4c}(u+c)^2 & \text{if } |u| \leq c, \\ \rho u & \text{if } u \geq c, \end{cases} \quad \mathcal{F}^-(\rho, c, u) = \begin{cases} \rho u & \text{if } u \leq -c, \\ -\frac{\rho}{4c}(u-c)^2 & \text{if } |u| \leq c, \\ 0 & \text{if } u \geq c, \end{cases}$$

and

$$c_{i+1/2}^n = \sqrt{p'(\rho_{i+1/2}^n)}, \quad \rho_{i+1/2}^n = \frac{\rho_i^n + \rho_{i+1}^n}{2}.$$

We note that $\mathcal{F}^\pm \geq 0$; the definition relies on the upwinding principles, according to the sign of the characteristic speeds $u \pm c$. For the momentum equation, we set

$$\frac{\rho_{i+1/2}^{n+1} u_{i+1/2}^{n+1} - \rho_{i+1/2}^n u_{i+1/2}^n}{\Delta t} + \frac{1}{\Delta x} (\mathcal{G}_{i+1}^n - \mathcal{G}_i^n) + \frac{1}{\Delta x} (\Pi_{i+1}^{n+1/2} - \Pi_i^{n+1/2}) = \frac{\mathcal{D}_{i+1}^{n+1} - \mathcal{D}_i^{n+1}}{\Delta x}. \quad (10)$$

In (10), a natural choice for the discretization of the pressure term would be $\Pi_i^{n+1/2} = p(\rho_i^n)$. However, it turns out that the semi-implicit formula $\Pi_i^{n+1/2} = \rho_i^n \Phi'(\rho_i^{n+1}) - \Phi(\rho_i^n)$ where $\rho \Phi'(\rho) - \Phi(\rho) = p(\rho)$, is a better choice, motivated by the consistency analysis of the scheme [2]. The convection fluxes are defined by

$$\begin{aligned} \mathcal{G}_i^n &= \frac{u_{i-1/2}^n}{2} \left(\mathcal{F}^+(\rho_{i-1}^n, c_{i-1/2}^n, u_{i-1/2}^n) + \mathcal{F}^+(\rho_i^n, c_{i+1/2}^n, u_{i+1/2}^n) \right) \\ &\quad + \frac{u_{i+1/2}^n}{2} \left(\mathcal{F}^-(\rho_i^n, c_{i-1/2}^n, u_{i-1/2}^n) + \mathcal{F}^-(\rho_{i+1}^n, c_{i+1/2}^n, u_{i+1/2}^n) \right), \end{aligned}$$

which, again, rely on upwinding principles. Finally, for the diffusion term, the definition is quite similar to (6)

$$\mathcal{D}_i^{n+1} = \mu \frac{u_{i+1/2}^{n+1} - u_{i-1/2}^{n+1}}{\Delta x}.$$

Relations (9) and (10) hold for $i = 1, \dots, I$, imposing furthermore $\rho_{I+1}^n = \rho_1^n$, $u_{1/2}^n = u_{I+1/2}^n$, $\mathcal{D}_{I+1}^{n+1} = \mu \frac{u_{3/2}^{n+1} - u_{I+1/2}^{n+1}}{\Delta x} = \mathcal{D}_1^{n+1}$.

In the following, this scheme will be referred to as *Eulerian staggered scheme 1*.

2.3 A staggered pseudo-Lagrangian scheme

In this section we propose a pseudo-Lagrangian scheme. We use the term ‘‘pseudo-Lagrangian’’ because although it approximates the solution in the Euler variables, it strongly uses the conservation of the quantities in material volumes. In this scheme, the density unknowns at time t^n , ρ_j^n , are *inside* the cells $(x_{j-1/2}^n, x_{j+1/2}^n)$, which are time-dependent, and the velocity unknowns $u_{j+1/2}^n$ are associated with the boundaries of the cells, the $x_{j+1/2}^n$'s. The latter are advected at velocity $u_{j+1/2}^n$. The discretization of the mass equation corresponds to the discretization of the relation

$$\frac{d}{dt} \int_{x(t)}^{y(t)} \rho(t, x) dx = 0,$$

with $x(t)$ and $y(t)$ moving at the fluid velocity. It expresses that the mass in every cell is constant in time. Namely, we obtain

$$\begin{cases} x_{j+1/2}^{n+1} = x_{j+1/2}^n + \Delta t u_{j+1/2}^n, & n \in \mathbb{N}, j = 1, \dots, J, \\ x_{1/2}^{n+1} = x_{J+1/2}^{n+1} - 1 & n = -1, \dots, +\infty, \\ \Delta x_j^{n+1} = x_{j+1/2}^{n+1} - x_{j-1/2}^{n+1}, & n = -1, \dots, +\infty, j = 1, \dots, J, \\ \rho_j^{n+1} = \rho_j^n \Delta x_j^n / \Delta x_j^{n+1}, & n \in \mathbb{N}, j \in 1, \dots, J. \end{cases} \quad (11)$$

The second equation in (11) accounts for the periodicity of the problem.

We turn to the momentum equation $\partial_t(\rho u) + \partial_x(\rho u^2) = \partial_x(\mu \partial_x u - p)$, which is interpreted as

$$\frac{d}{dt} \int_{x(t)}^{y(t)} \rho(t, x) u(t, x) dx = \mu \partial_x u(t, y(t)) - p(t, y(t)) - (\mu \partial_x u(t, x(t)) - p(t, x(t))).$$

It is approximated by

$$\left\{ \begin{array}{l} \rho_{j+1/2}^{n+1} u_{j+1/2}^{n+1} \Delta x_{j+1/2}^{n+1} = \rho_{j+1/2}^n u_{j+1/2}^n \Delta x_{j+1/2}^n \\ \quad - (p_{j+1}^{n+1} - p_j^{n+1}) + \mu \left(\frac{u_{j+3/2}^{n+1} - u_{j+1/2}^{n+1}}{\Delta x_{j+1}^{n+1}} - \frac{u_{j+1/2}^{n+1} - u_{j-1/2}^{n+1}}{\Delta x_j^{n+1}} \right), \quad n \in \mathbb{N}, j = 1, \dots, J, \\ u_{1/2}^{n+1} = u_{J+1/2}^{n+1}, \quad n \in \mathbb{N}, \\ u_{J+3/2}^{n+1} = u_{3/2}^{n+1}, \quad n \in \mathbb{N}, \\ p_{J+1}^{n+1} = p_1^{n+1}, \quad n \in \mathbb{N}, \\ \Delta x_{J+1}^{n+1} = \Delta x_1^{n+1}, \quad n \in \mathbb{N}, \end{array} \right. \quad (12)$$

where the last four equations stand for the periodicity. In these formulae, we use the quantities $\rho_{j+1/2}^{n+1}$, $\Delta x_{j+1/2}^{n+1}$ and p_j^{n+1} that were not defined previously: we choose for them the following rather natural definition:

$$\left\{ \begin{array}{l} \Delta x_{j+1/2}^{n+1} = (\Delta x_j^{n+1} + \Delta x_{j+1}^{n+1})/2, \quad n = -1, \dots, +\infty, j = 1, \dots, J, \\ \rho_{j+1/2}^{n+1} \Delta x_{j+1/2}^{n+1} = (\rho_j^{n+1} \Delta x_j^{n+1} + \rho_{j+1}^{n+1} \Delta x_{j+1}^{n+1})/2, \quad n = -1, \dots, +\infty, j = 1, \dots, J, \\ p_j^{n+1} = p(\rho_j^{n+1}), \quad n = -1, \dots, +\infty, j = 1, \dots, J. \end{array} \right. \quad (13)$$

Complemented with initial conditions ρ_j^0 , $u_{j+1/2}^0$, $x_{j+1/2}^0$, the scheme is defined. Note that we have chosen an implicit approximation for the diffusion, in order to avoid any parabolic stability condition (and indeed we *observe* the stability of the algorithm).

2.4 A last staggered scheme

In this section we propose another staggered scheme, that can be viewed as a Eulerian version of the preceding pseudo-Lagrangian one. Here the cells are fixed and, starting from the pseudo-Lagrangian scheme, we have to take the transport into account. With the same notations, but now the length Δx of the cells is constant, the mass conservation is replaced with

$$\rho_j^{n+1} = \rho_j^n - \frac{\Delta t}{\Delta x} \left(\rho_{j+1/2,U}^n u_{j+1/2}^n - \rho_{j-1/2,U}^n u_{j-1/2}^n \right), \quad n \in \mathbb{N}, j \in 1, \dots, J, \quad (14)$$

where $\rho_{j+1/2,U}^n$ is upwinded, that is to say that it is ρ_j^n if $u_{j+1/2}^n \geq 0$ and $\rho_{j+1/2}^n$ if $u_{j+1/2}^n < 0$.

The momentum equation is approximated by

$$\left\{ \begin{array}{l} \rho_{j+1/2}^{n+1} u_{j+1/2}^{n+1} = \rho_{j+1/2}^n u_{j+1/2}^n - \frac{\Delta t}{2\Delta x} \left(\rho_{j+3/2}^{n+1} |u_{j+3/2}^n|^2 - \rho_{j-1/2}^{n+1} |u_{j-1/2}^n|^2 \right) \\ \quad - \frac{\Delta t}{\Delta x} (p_{j+1}^{n+1} - p_j^{n+1}) + \mu \frac{\Delta t}{\Delta x^2} \left(u_{j+3/2}^{n+1} - 2u_{j+1/2}^{n+1} + u_{j-1/2}^{n+1} \right), \quad n \in \mathbb{N}, j = 1, \dots, J, \\ u_{1/2}^{n+1} = u_{J+1/2}^{n+1}, \quad n \in \mathbb{N}, \\ u_{J+3/2}^{n+1} = u_{3/2}^{n+1}, \quad n \in \mathbb{N}, \\ p_{J+1}^{n+1} = p_1^{n+1}, \quad n \in \mathbb{N}, \\ \Delta x_{J+1}^{n+1} = \Delta x_1^{n+1}, \quad n \in \mathbb{N}, \end{array} \right. \quad (15)$$

where the last four equations stand for the periodicity. In these formulae, we use the quantities $\rho_{j+1/2}^{n+1}$ and p_j^{n+1} that were not defined previously: we choose for them the following rather natural definition:

$$\begin{cases} \rho_{j+1/2}^{n+1} = (\rho_j^{n+1} + \rho_{j+1}^{n+1})/2, & n = -1, \dots, +\infty, j = 1, \dots, J, \\ p_j^{n+1} = p(\rho_j^{n+1}), & n = -1, \dots, +\infty, j = 1, \dots, J. \end{cases} \quad (16)$$

Complemented with initial conditions $\rho_j^0, u_{j+1/2}^0, x_{j+1/2}^0$, the scheme is defined. Note that we have chosen an implicit approximation for the diffusion, in order to avoid any parabolic stability condition (and indeed we *observe* the stability of the algorithm). The convection term in the momentum equation is centered, but for fixed (not too small) viscosity coefficient, this does not make instabilities appear.

In the following, this scheme will be referred to as *Eulerian staggered scheme 2*.

3 Convergence analysis à la Lax-Wendroff

In this section, we investigate the convergence of the Rusanov scheme. For the sake of simplicity, we restrict the analysis to the case of uniform meshes: all cells have the same length. We consider a sequence of meshes, parametrized by $k \in \mathbb{N}$, such that Δx_k and Δt_k both tend to 0, with $\frac{\Delta x_k}{\Delta t_k} = \lambda$ for some $\lambda > 0$ to ensure some stability property, for instance the positivity of the density.

The discrete initial data are given by

$$\rho_j^0 = \frac{1}{\Delta x_k} \int_{x_{j-1/2}}^{x_{j+1/2}} \rho^0(x) dx, \quad u_j^0 = \frac{1}{\Delta x_k} \int_{x_{j-1/2}}^{x_{j+1/2}} u^0(x) dx \text{ for all } j \in \{1, \dots, I\}.$$

The discrete approximation of ρ and u are denoted by

$$\begin{aligned} \rho_k(t, x) &= \sum_{n=0}^{N-1} \sum_{j=1}^I \rho_j^n \mathbf{1}_{[t^n, t^{n+1})}(t) \mathbf{1}_{[x_{j-1/2}, x_{j+1/2})}(x), \\ u_k(t, x) &= \sum_{n=0}^{N-1} \sum_{j=1}^I u_j^n \mathbf{1}_{[t^n, t^{n+1})}(t) \mathbf{1}_{[x_{j-1/2}, x_{j+1/2})}(x). \end{aligned}$$

We bear in mind that ρ_j^n and u_j^n also depend on k but this dependency is omitted to simplify the notation. The following statement is in the same spirit as the standard Lax-Wendroff theorem for conservation laws, see [21, Section 12.10].

Theorem 3.1 *Suppose that*

- *there exists a constant $C_\infty > 0$ such that*

$$\sup_k \left(\|u_k\|_{L^\infty((0,T) \times (0,1))} + \|\rho_k\|_{L^\infty((0,T) \times (0,1))} \right) \leq C_\infty.$$

- *there exists $(\rho, u) \in L^\infty((0, T) \times (0, 1))^2$ such that (ρ_k, u_k) converges to (ρ, u) in $L^r((0, T) \times (0, 1))^2$ for any $1 \leq r < +\infty$.*

Then the pair (u, ρ) is a weak solution of (1).

Remark 3.2 The statement remains true when $\mu(\rho) = C\rho$ at the price of assuming

$$u \in L^r(0, T; W^{1,r}(0, 1))$$

and

$$\frac{u_k(t, x + \Delta x_k) - u_k(t, x)}{\Delta x_k} \rightharpoonup \nabla u(t, x) \text{ weakly in } L^r((0, T) \times (0, 1)).$$

It equally applies for a continuous function μ , with the additional assumptions that the convergence of (ρ_k, u_k) to (ρ, u) holds almost everywhere.

Proof. Consider a test function $\zeta = (\varphi, \chi) \in \mathcal{C}_0^\infty([0, T] \times (0, 1); \mathbb{R}^2)$. We assume that Δt_k and Δx_k are small enough so that $\text{supp}(\zeta) \subset [0, T - \Delta t_k] \times (2\Delta x_k, 1 - 2\Delta x_k)$. For $n \in \{0, \dots, N-1\}$ and $j \in \{1, \dots, I\}$, let us denote $\zeta_j^n = \zeta(t^n, x_j)$, and, for all $t \in (0, T)$, $x \in (0, 1)$,

$$\zeta_{\Delta t_k, \Delta x_k}(t, x) = \sum_{n=0}^{N-1} \sum_{j=1}^I \zeta_j^n \mathbb{1}_{[t^n, t^{n+1})}(t) \mathbb{1}_{[x_{j-1/2}, x_{j+1/2})}(x), \quad \zeta_k = \zeta_{\Delta t_k, \Delta x_k}.$$

We multiply the discrete mass conservation equation by $\Delta x_k \Delta t_k \varphi_j^n$, and we sum over j and n . We obtain

$$\Delta x_k \sum_{n=0}^{N-1} \sum_{j=1}^I (\rho_j^{n+1} - \rho_j^n) \varphi_j^n + \Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^I \left[[\mathcal{F}_{j+1/2}^n]_1 - [\mathcal{F}_{j-1/2}^n]_1 \right] \varphi_j^n = 0.$$

The first term on the left hand side recasts as

$$\Delta x_k \sum_{n=0}^{N-2} \sum_{j=1}^I \rho_j^{n+1} (\varphi_j^n - \varphi_j^{n+1}) + \underbrace{\Delta x_k \sum_{j=1}^I \rho_j^N \varphi_j^N}_{=0} - \Delta x_k \sum_{j=1}^I \rho_j^0 \varphi_j^0,$$

while the second term becomes

$$\Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^{I-1} [\mathcal{F}_{j+1/2}^n]_1 (\varphi_j^n - \varphi_{j+1}^n) + \underbrace{\Delta t_k \sum_{n=0}^{N-1} [\mathcal{F}_{I+1/2}^n]_1 \varphi_I^n - \Delta t_k \sum_{n=0}^{N-1} [\mathcal{F}_{1/2}^n]_1 \varphi_{1/2}^n}_{=0}.$$

Hence we get

$$\Delta x_k \sum_{n=0}^{N-2} \sum_{j=1}^I \rho_j^{n+1} (\varphi_j^n - \varphi_j^{n+1}) + \Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^{I-1} [\mathcal{F}_{j+1/2}^n]_1 (\varphi_j^n - \varphi_{j+1}^n) = \Delta x_k \sum_{j=1}^I \rho_j^0 \varphi_j^0. \quad (17)$$

Using (3), the estimates and convergence assumed for (ρ_k, u_k) , we obtain as $k \rightarrow \infty$

$$\begin{aligned} \Delta x_k \sum_{n=0}^{N-2} \sum_{j=1}^I \rho_j^{n+1} (\varphi_j^n - \varphi_j^{n+1}) &\rightarrow \int_0^T \int_0^1 \rho \partial_t \varphi \, dx \, dt, \\ \Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^{J-1} [F_{j+1/2}^n]_1 (\varphi_j^n - \varphi_{j+1}^n) &\rightarrow \int_0^T \int_0^1 \rho u \partial_x \varphi \, dx \, dt, \\ \Delta x_k \sum_{j=1}^I \rho_j^0 \varphi_j^0 &\rightarrow \int_0^1 \rho^0(x) \varphi(0, x) \, dx. \end{aligned} \tag{18}$$

We turn to the momentum equation (5). Proceeding similarly, we obtain

$$\begin{aligned} \Delta x_k \sum_{n=0}^{N-1} \sum_{j=1}^I (\rho_j^{n+1} u_j^{n+1} - \rho_j^n u_j^n) \chi_j^n + \Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^I \left[[\mathcal{F}_{j+1/2}^n]_2 - [\mathcal{F}_{j-1/2}^n]_2 \right] \chi_j^n \\ - \Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^I \left[\mu(\rho_{j+1/2}^{n+1}) \frac{u_{j+1}^{n+1} - u_j^{n+1}}{\Delta x_k} - \mu(\rho_{j-1/2}^{n+1}) \frac{u_j^{n+1} - u_{j-1}^{n+1}}{\Delta x_k} \right] \chi_j^n = 0. \end{aligned}$$

The first two sums can be written as

$$\Delta x_k \sum_{n=0}^{N-2} \sum_{j=1}^{I-1} \rho_j^{n+1} u_j^{n+1} (\chi_j^n - \chi_{j+1}^{n+1}) + \Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^{I-1} [\mathcal{F}_{j+1}^n]_2 (\chi_j^n - \chi_{j+1}^n),$$

which can be treated as for the mass conservation equation, by using that the product $\rho_k u_k$ still converges in $L^r((0, T) \times (0, 1))$ for $1 \leq r < +\infty$. Let us study the viscous term

$$\Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^I \left[\mu(\rho_{j+1/2}^{n+1}) \frac{u_{j+1}^{n+1} - u_j^{n+1}}{\Delta x_k} - \mu(\rho_{j-1/2}^{n+1}) \frac{u_j^{n+1} - u_{j-1}^{n+1}}{\Delta x_k} \right] \chi_j^n. \tag{19}$$

The case where the viscosity μ is constant can be handled by using two summations by parts, which allow us to write (19) as

$$\Delta t_k \sum_{n=0}^{N-1} \sum_{j=2}^{I-1} u_j^{n+1} \frac{\chi_{j+1}^n - 2\chi_j^n + \chi_{j-1}^n}{\Delta x_k}.$$

This can be cast as

$$\int_0^{T-\Delta t_k} \int_{2\Delta x_k}^{1-2\Delta x_k} u_k(t + \Delta t_k, x) \frac{\chi_k(t, x + \Delta x_k) - 2\chi_k(t, x) + \chi_k(t, x - \Delta x_k)}{\Delta x_k^2} \, dx \, dt,$$

and using the uniform convergence of χ_k and its derivatives, together with the convergence in L^r of u_k , we are able to pass to the limit: as $k \rightarrow \infty$, we obtain

$$\int_0^T \int_0^1 u(t, x) \partial_{xx}^2 \chi(t, x) \, dx \, dt.$$

which completes the proof in the case of constant viscosity.

When μ depends on the density, we cannot proceed this way, and we need further as-

sumptions. We start by writing (19) as

$$\begin{aligned}
& \Delta t_k \sum_{n=0}^{N-1} \sum_{j=1}^I \left[\mu(\rho_{j+1/2}^{n+1}) \frac{u_{j+1}^{n+1} - u_j^{n+1}}{\Delta x_k} - \mu(\rho_{j-1/2}^{n+1}) \frac{u_j^{n+1} - u_{j-1}^{n+1}}{\Delta x_k} \right] \chi_j^n \\
&= \int_{\Delta t_k}^T \int_0^1 \mu \left(\frac{\rho_k(t, x_k + \Delta x_k) + \rho_k(t, x)}{2} \right) \frac{u_k(t, x + \Delta x_k) - u_k(t, x)}{\Delta x_k} \\
&\quad \times \frac{\chi_k(t - \Delta t_k, x) - \chi_k(t - \Delta t_k, x + \Delta x_k)}{\Delta x_k} dx dt. \tag{20}
\end{aligned}$$

To pass to the limit in the previous term we use a weak-strong convergence argument observing that

$$\begin{aligned}
& \mu \left(\frac{\rho_k(t, x_k + \Delta x_k) + \rho_k(t, x)}{2} \right) \frac{\chi_k(t - \Delta t_k, x) - \chi_k(t - \Delta t_k, x + \Delta x_k)}{\Delta x_k} \\
&\quad \xrightarrow[k \rightarrow \infty]{} \mu(\rho(t, x)) \partial_x \chi(t, x) \text{ in } L^r((0, T) \times (0, 1)).
\end{aligned}$$

This combines to the assumption that ∇u_k converges weakly in $L^r((0, T) \times (0, 1))$ so that (20) tends to

$$\int_0^T \int_0^1 \mu(\rho(t, x)) \partial_x u(t, x) \partial_x \chi(t, x) dx dt,$$

which concludes the proof. ■

4 Numerical results

Here, we present some numerical results that illustrate the behavior of the proposed schemes.

4.1 Comparisons

In this subsection, we compare the results obtained with the 4 different schemes that are dealt with in the paper. The results here are obtained at time $t = 0.1$ with $\mu = 0.1$ for the initial condition $u^0(x) = 0$ and $\rho^0(x) = 0.125 + 1.875\chi_{[1/4, 3/4]}(x)$.

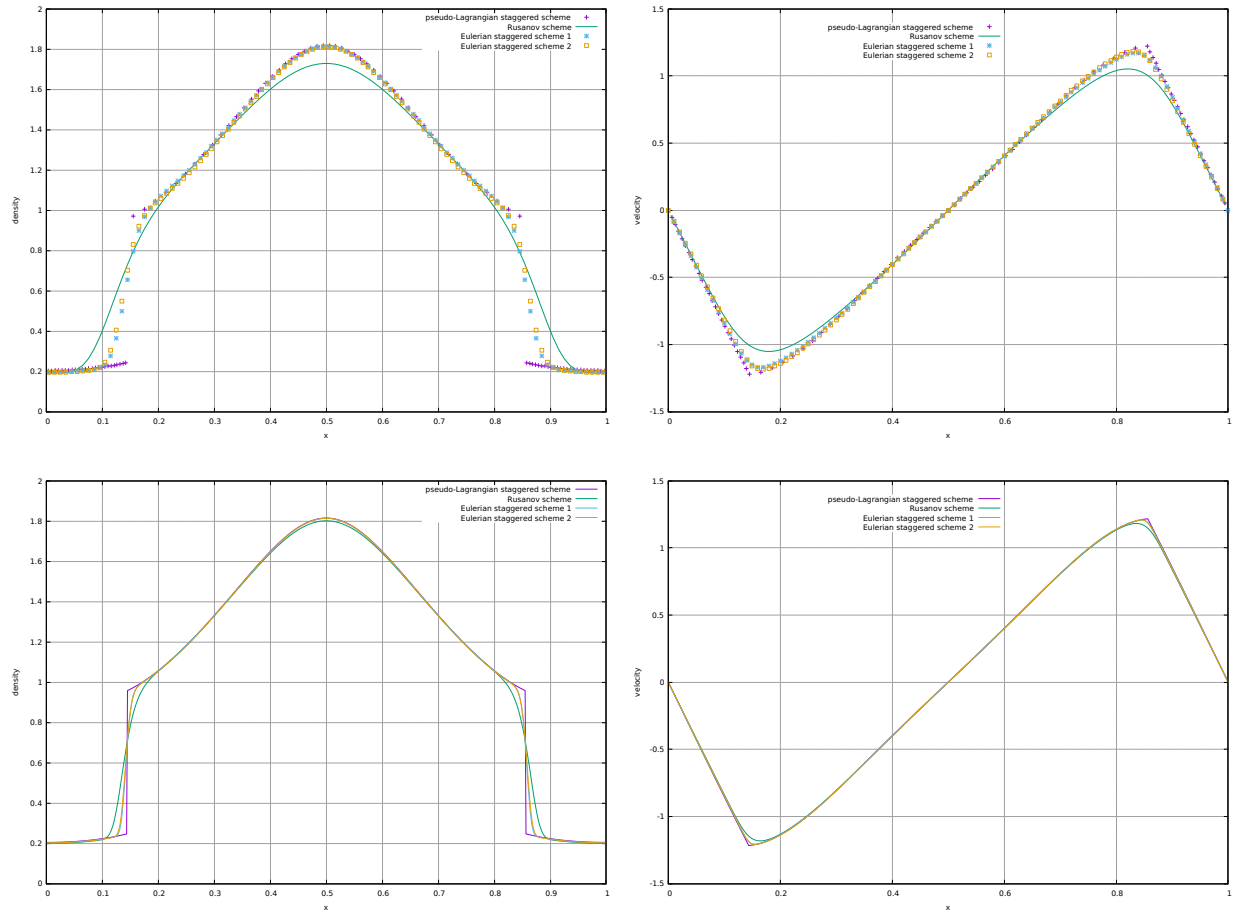


Figure 1: Density and velocity solutions staggered at time 0.1, with 100 cells (top) and 800 cells (bottom).

We see that the four schemes seem to converge to the same solution, and that the pseudo-Lagrange scheme is less diffusive (the scheme based on the Rusanov flux is the most diffusive). In particular, the pseudo-Lagrange scheme is able to maintain some discontinuities in the density and in the velocity derivative.

For the same test-case, we now more precisely compare these four schemes, in the velocity variable. In Table 1 we compare, for different numbers of cells, the non-diffusive pseudo-Lagrangian scheme from Section 2.3 and the Eulerian Rusanov scheme from Section 2.1. The difference between these schemes seems to be of order $1/2$, both in the L^1 and in the L^∞ norms. Note that the schemes are subject to some hyperbolic-typed Courant-Friedrichs-Lewy conditions, so that the time step is of the same order as the space step. Note also that to compare the solutions, as they are not obtained on the same meshes (the pseudo-Lagrange scheme is running on a moving mesh), we interpolate the difference of the two solutions on a mesh that is the intersection of the two and consider both solutions as constant-by-cell. In Table 2 we compare the pseudo-Lagrange and the Eulerian staggered scheme 1 presented in

Section 2.2. In Table 4 we compare the pseudo-Lagrange and the Eulerian staggered scheme 2 from Section 2.4. We observe the same order of convergence.

Number of cells J	Difference in L^1 norm	Difference in L^∞ norm
100	0.734125	0.247230
200	0.038315	0.171206
400	0.019801	0.110994
800	0.010399	0.077385
1600	0.005710	0.052437
3200	0.003376	0.037031
6400	0.002201	0.251310
12800	0.001535	0.017738
25600	0.001090	0.012551

Table 1: Difference between the pseudo-Lagrange scheme and the Rusanov scheme.

Number of cells J	Difference in L^1 norm	Difference in L^∞ norm
100	0.031244	0.116505
200	0.015694	0.076648
400	0.007999	0.048226
800	0.004164	0.033637
1600	0.002299	0.022405
3200	0.001393	0.015951
6400	0.000913	0.010339
12800	0.000629	0.007328
25600	0.000445	0.005201

Table 2: Difference between the Pseudo-Lagrange scheme and the Euler staggered scheme 1.

Number of cells J	Difference in L^1 norm	Difference in L^∞ norm
100	0.022931	0.109549
200	0.012467	0.062358
400	0.007078	0.048725
800	0.004213	0.030653
1600	0.002638	0.023727
3200	0.001723	0.016027
6400	0.001159	0.011299
12800	0.000793	0.008065
25600	0.000549	0.005608

Table 3: Difference between the Pseudo-Lagrange scheme and the Euler staggered scheme 2.

4.2 Behavior of the pseudo-Lagrange scheme on Hoff-type discontinuous solutions

In this section, we would like to illustrate a very interesting property of discontinuous solutions *à la* Hoff. These solutions, among which one finds the one illustrated in the previous section, have been studied by Hoff (see [15]). They consist in solutions with discontinuities in density, and thus in pressure and in the derivative of the velocity (because the effective flux $p - \mu \partial_x u$ is continuous in space for almost every time). In [15] it is shown that the amplitude of the jump in $\log(\rho)$ decreases exponentially in time, with a rate that is at least some constant over the viscosity coefficient μ . We do not precise the result here because the constant depends on the maximum value of the density in the flow, and because actually the context of [15] is a bit different: it considers the Navier-Stokes system in Lagrange variables with a space variable ranging over \mathbb{R} , with a single discontinuity, while here we consider the Navier-Stokes system on the torus. We propose to analyse numerically the behavior of the jump of $\log(\rho)$. This is made possible thanks to the use of a pseudo-Lagrange scheme that does not smooth the discontinuity in ρ artificially. With the same initial condition as in the previous section, Figure 2 presents the amplitude of the jump in $\log(\rho)$ with respect to time, with 500 cells in space. We also present its best approximation as $\exp(a + bt)$ by computing a and b by the least square method. Note that it is not relevant to do this on a too large time interval (with a given cell size), because the amplitude of the jump decays exponentially fast and it rapidly becomes of the same order as the cell size so that it cannot be distinguished from the natural steps of the discrete solution in regular regions.

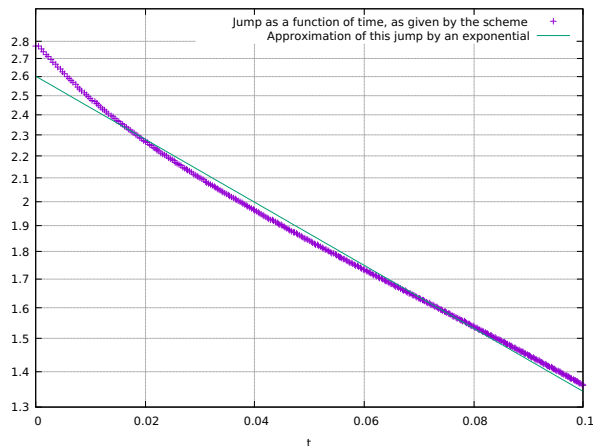


Figure 2: Jump of the quantity $\log(\rho)$ as a function of time.

Now we want to evaluate the rate at which the jump decreases as a function of the viscosity coefficient. Table 4 provides the coefficient b computed by the least square method, for various values of μ .

Viscosity coefficient μ	Rate
0.1	-6.62
0.05	-11.05
0.025	-22.17
0.0125	-54.04
0.0675	-105.14

Table 4: Rate for the (decreasing) amplitude of the jump of the logarithm of ρ .

We note in Table 4 that the jump $[\log(\rho)]$ (with usual notations for the jump of a quantity) seems to behave as $\exp(-Ct/\mu)$, which is exactly the majoration proved in [15]. Note that this is a very interesting phenomenon: as μ tends to 0, this kind of discontinuities do not persist at all (they disappear at time $t = 0^+$), what is a paradox, as for compressible inviscid gases discontinuities are expected (and they are called shocks). This result by Hoff thus proves that the shocks in inviscid gases are limits of smooth parts in the solutions of viscous gases, in which the amplitude of discontinuities tends to 0.

References

- [1] F. Berthelin, T. Goudon, and S. Minjeaud. Consistency analysis of a 1D finite volume scheme for barotropic Euler models. In J. Fuhrmann, M. Ohlberger, and C. Rohde, editors, *Finite Volumes for Complex Applications VII; Methods, Theoretical Aspects*,

- and Elliptic, Parabolic and Hyperbolic Problems, Berlin*, volume 77 and 78 of *Springer Proceedings in Mathematics & Statistics*, pages 97–106. Springer, 2014.
- [2] F. Berthelin, T. Goudon, and S. Minjeaud. Kinetic schemes on staggered grids for barotropic Euler models: entropy-stability analysis. *Math. Comput.*, 84:2221–2262, 2015.
 - [3] F. Berthelin, T. Goudon, and S. Minjeaud. Multifluid flows: a kinetic approach. *J. Sci. Comput.*, 66(2):792–824, 2016.
 - [4] D. Bresch and P. E. Jabin. Global existence of weak solutions for compressible Navier-Stokes equations: thermodynamically unstable pressure and anisotropic viscous stress tensor. *Ann. Math.*, 188(2):577–684, 2018.
 - [5] D. Bresch, A. Vasseur, and Ch. Yu. Global existence of entropy-weak solutions to the compressible Navier-Stokes equations with non-linear density dependent viscosities. Technical report, Univ. Texas Austin, 2019.
 - [6] G.-Q. Chen, D. Hoff, and K. Trivisa. Global solutions of the compressible Navier-Stokes equations with large discontinuous initial data. *Comm. Partial Differential Equations*, 25:2233–2257, 2000.
 - [7] E. Feireisl. *Dynamics of viscous compressible fluids*, volume 26 of *Oxford Lecture Series in Mathematics and its Applications*. Oxford University Press, Oxford, 2004.
 - [8] T. Gallouët, R. Herbin, and J.-C. Latché. Kinetic energy control in explicit finite volume discretizations of the incompressible and compressible Navier-Stokes equations. *Int. J. Finite Vol.*, 7(2):6, 2010.
 - [9] T. Gallouët, R. Herbin, D. Maltese, and A. Novotny. Error estimates for a numerical approximation to the compressible barotropic Navier-Stokes equations. *IMA J. Numer. Anal.*, 36(2):543–592, 2016.
 - [10] L. Gastaldo, R. Herbin, W. Kheriji, C. Lapuerta, and J.-C. Latché. Staggered discretizations, pressure correction schemes and all speed barotropic flows. In *Finite Volumes for Complex Applications VI, Problems and Perspectives, Prague, Czech Republic*, volume 4, pages 839–855, 2011.
 - [11] D. Gilbarg. The existence and limit behavior of the one-dimensional shock layer. *Amer. J. Math.*, 73:256–274, 1951.
 - [12] T. Goudon, J. Llobell, and S. Minjeaud. An explicit MUSCL scheme on staggered grids with kinetic-like fluxes for the barotropic and full Euler system. *Comm. Comput. Phys.*, 2020. To appear.

- [13] R. Herbin, W. Kheriji, and J.-C. Latché. Staggered schemes for all speed flows. *ESAIM:Proc*, 35:122–150, 2012. Actes du Congrès National de Mathématiques Appliquées et Industrielles.
- [14] R. Herbin, J.-C. Latché, and T. T. Nguyen. Explicit staggered schemes for the compressible Euler equations. In *Applied mathematics in Savoie—AMIS 2012: Multiphase flow in industrial and environmental engineering*, volume 40 of *ESAIM Proc.*, pages 83–102. EDP Sci., Les Ulis, 2013.
- [15] D. Hoff. Global existence for 1D, compressible, isentropic Navier-Stokes equations with large initial data. *Trans. Amer. Math. Soc.*, 303(1):169–181, 1987.
- [16] D. Hoff and T.-P. Liu. The inviscid limit for the Navier-Stokes equations of compressible, isentropic flow with shock data. *Indiana Univ. Math. J.*, 38(4):861–915, 1989.
- [17] D. Hoff and J. Smoller. Solutions in the large for certain nonlinear parabolic systems. *Ann. Inst. Henri Poincaré, Anal. Non lin.*, 2:213–235, 1985.
- [18] T. K. Karper. Convergent finite differences for 1D viscous isentropic flow in Eulerian coordinates. *Disc. Cont. Dyn. Syst.- S*, 7(5):993–1023, 2014.
- [19] A. V. Kazhikhov and V. V. Shelukhin. Unique global solution with respect to time of initial-boundary value problems for one-dimensional equations of a viscous gas. *Prikl. Mat. Meh.*, 41:282–291, 1977.
- [20] W. Kheriji, R. Herbin, and J.-C. Latché. Pressure correction staggered schemes for barotropic one-phase and two-phase flows. *Comput. & Fluids*, 88:524 – 542, 2013.
- [21] R. J. Leveque. *Finite Volume Methods for Hyperbolic Problems*. Cambridge Texts in Appl. Math. Cambridge Univ. Press, 2004.
- [22] P.-L Lions. *Mathematical topics in fluid mechanics. Vol. 2: Compressible models*, volume 10 of *Oxford Lecture Series in Mathematics and its Applications*. The Clarendon Press, Oxford University Press, New York, 1998. Compressible models, Oxford Science Publications.
- [23] M.-S. Liou and C. J. Steffen Jr. A new flux splitting scheme. *J. Comput. Phys.*, 107:23–39, 1993.
- [24] J. Llobell. *Schémas Volumes Finis à mailles décalées pour la dynamique des gaz*. PhD thesis, Université Côte d’Azur, 2018.
- [25] A. Mellet and A. Vasseur. On the barotropic compressible Navier-Stokes equations. *Comm. PDE*, 32(3):431–452, 2007.
- [26] D. Serre. Variations de grande amplitude pour la densité d’un fluide visqueux compressible. *Phys. D*, 48(1):113–128, 1991.

- [27] A. Vasseur and Ch. Yu. Existence of global weak solutions for 3D degenerate compressible Navier-Stokes equations. *Invent. Math.*, 206(3):935–974, 2016.